Betty Boost

© 2016 lectric-fx

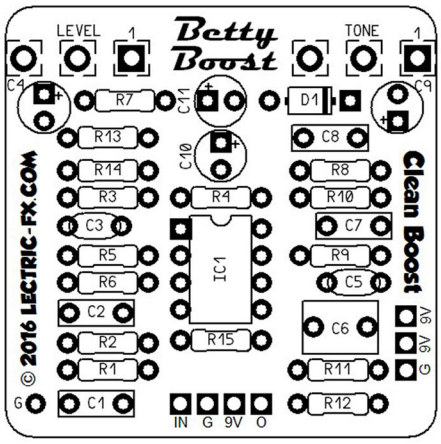

The Betty Boost is a high impedence clean booster, based on the DOD FX-10. The bypass switching of the original unit has been tossed out in favor of true bypass. The original unit claimed a signal boost of up to 17 dB, “improving an instrument’s signal-to-noise ratio and performance.”

The tone control allows this the functionality to operate as either a bass boost or a treble boost.
This unit sounds great at 18v, so a 3PRR from madbeanpedals.com could work out well in this pedal! (Betty Boost 3PRR drill template included)

Part #	Value
R1	10M
R2	10K
R3	3M9
R4	47k
R5	330k
R6	100k
R7	18k
R8	3k3
R9	18k
R10	3k3
R11	1k
R12	100k
R13	22k
R14	22k
R15	47R

Part #	Value
C1	10n
C2	22n
C3	120p
C4	10uF
C5	120p
C6	1uF
C7	100n
C8	22n
C9	10uF
C10	47uF
C11	47uF

Part #	Value
D1	1n4001
IC1	TL072
TONE	100KB
LEVEL	500KC

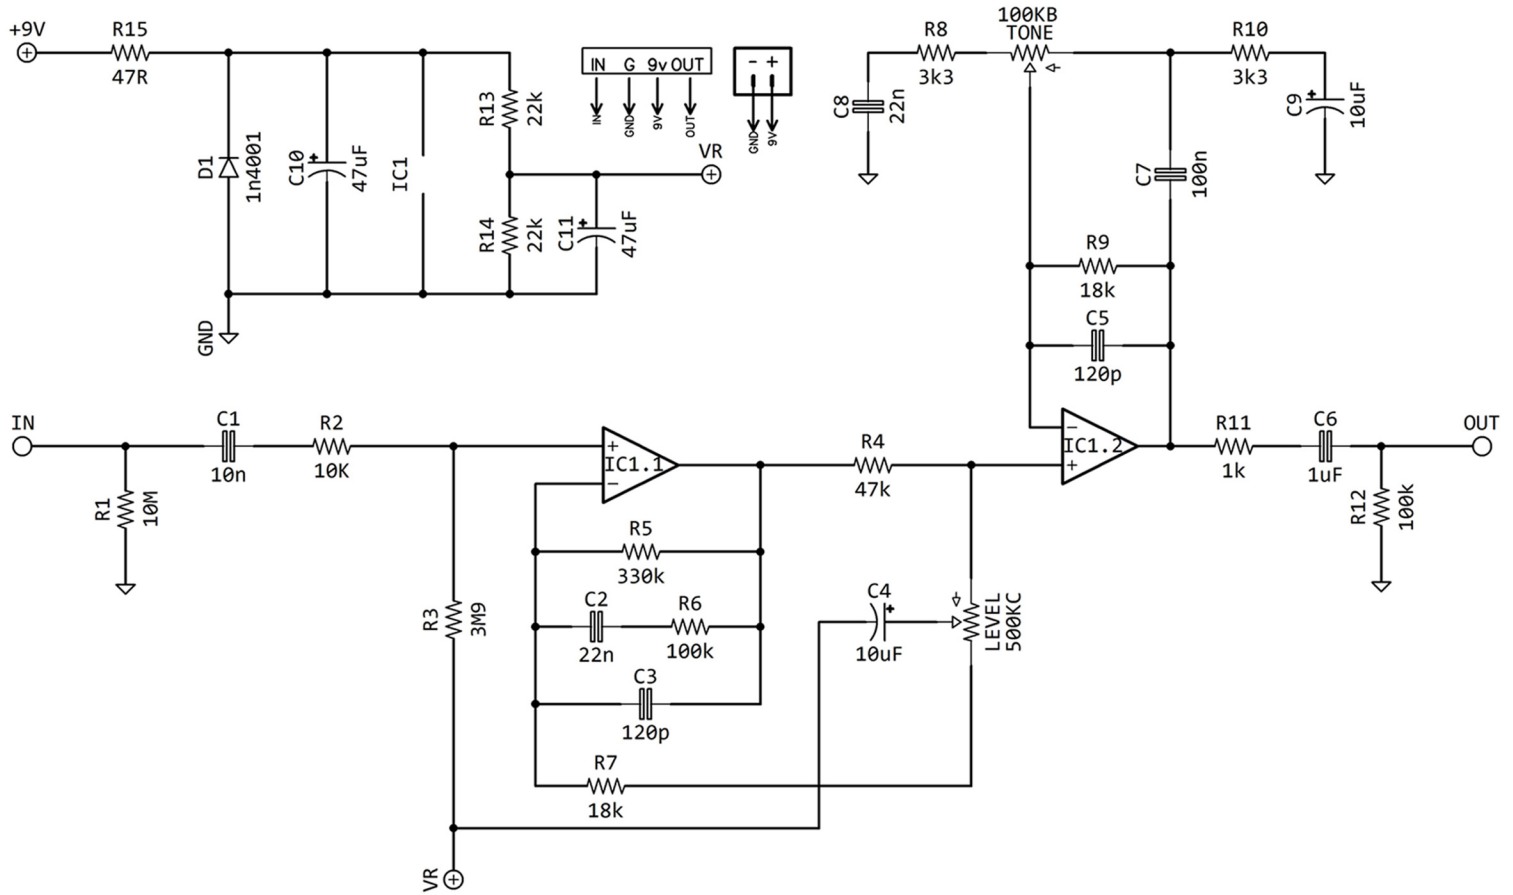

Betty Boost

© 2016 lectric-fx

Drilling Template

Please measure carefully,this is an apprximation only.

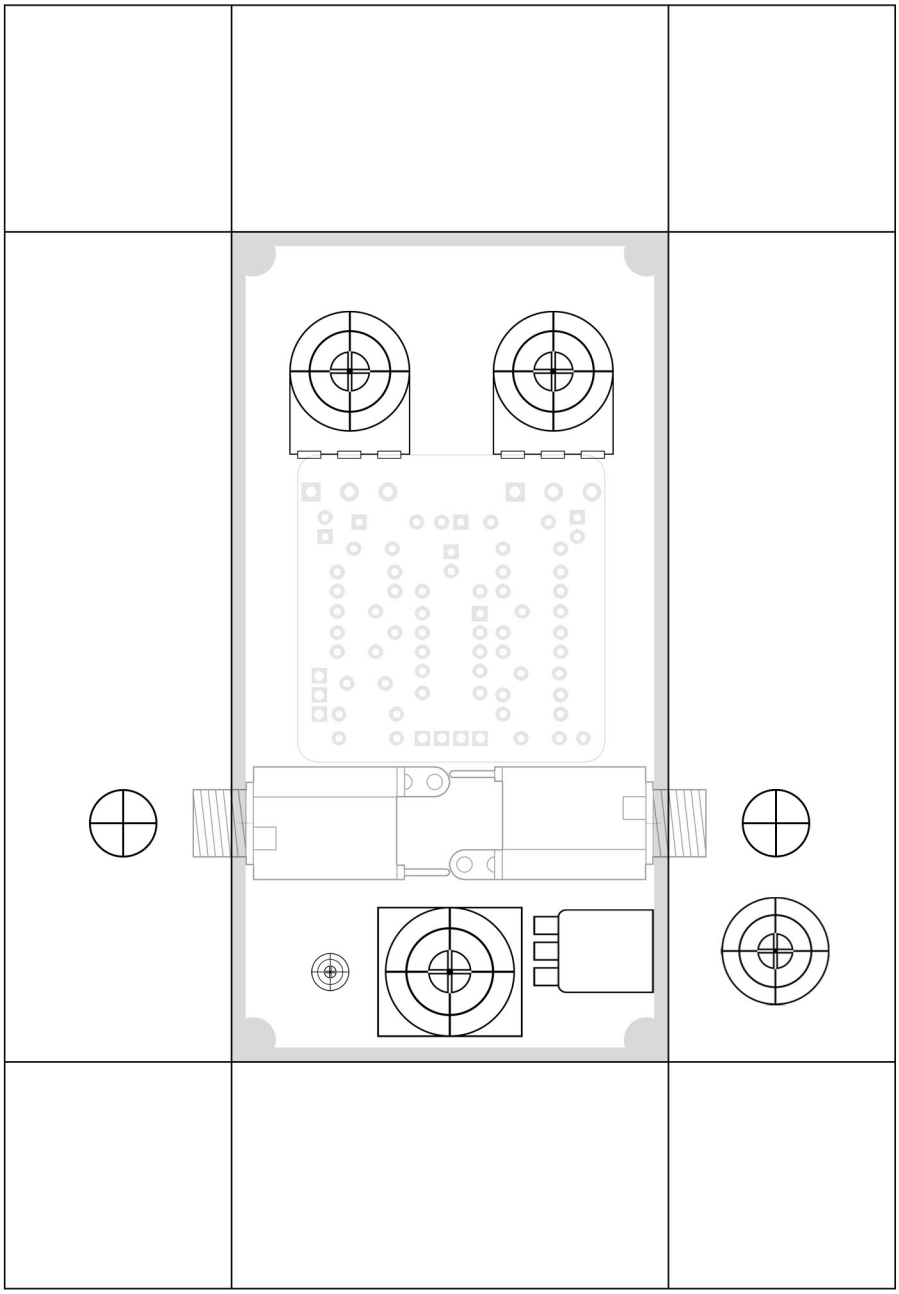

Drilling Template (w 3PRR)
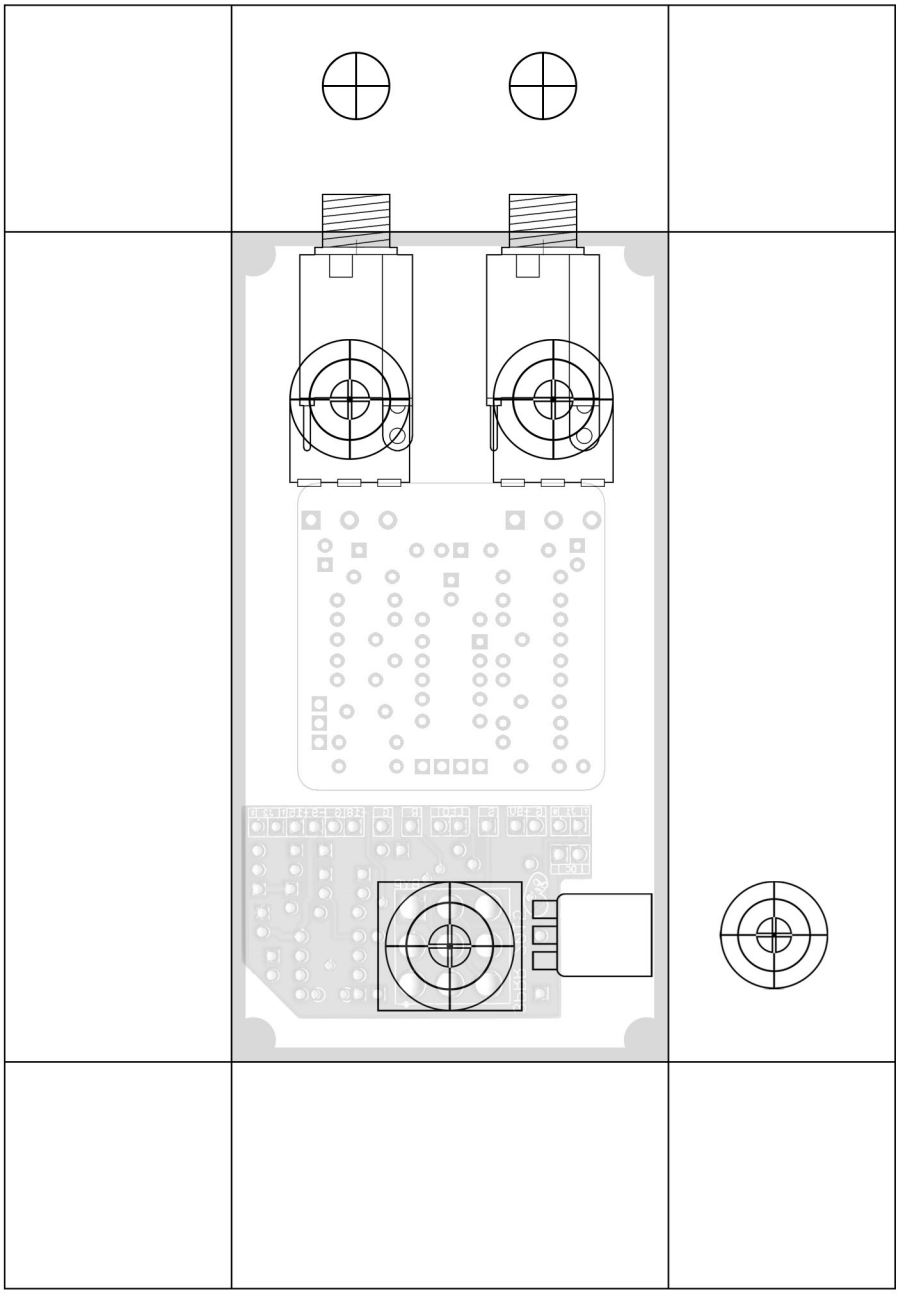
Measure carefully here. Mini i/o jacks
such as lumberg will be needed.